



Model: WR11000

BE11000

Multi-Gigabit
Wi-Fi 7 Mesh Router





Specifications

- Qualcomm 1.5 GHz Quad-Core 64-Bit Cortex-A53 CPU
- Waring Tri-Band BE11000 Wi-Fi 7
- High-Power External FEMs for Broader Wi-Fi Coverage
- 4× 2.5G Ethernet Ports for Multi-Gig Internet
- 6× Fixed Antennas with Beamforming
- Ultra-Wide 240/320 MHz Bandwidth
- MLO, Puncturing, OFDMA, MU-MIMO
- IPv4/IPv6, TR069/TR098/TR181/TR111

Hardware Features

Processor	Qualcomm IPQ5322 1.5 GHz Quad-Core CPU
RAM / Flash	512 MB DDR4 RAM / 128 MB NAND Flash
Antennas	6× Fixed Omni-Directional Antennas
Ethernet Ports	1× 10/100/1000/2500 Mbps WAN Port
	3× 10/100/1000/2500 Mbps LAN Ports
Buttons	WPS Button, Reset Button
Power Supply	12 V / 2 A
Dimensions (W×D×H)	253×152.5×48.2 mm
	(9.96×6×1.9 inches)

Wireless Features

Wireless Standards	IEEE 802.11be/ax 6 GHz
	IEEE 802.11be/ax/ac/n/a 5 GHz
	IEEE 802.11be/ax/n/b/g 2.4 GHz
Wireless Frequency	6 GHz, 5 GHz, 2.4 GHz
Wireless Bandwidth	20/40/80/160/240/320 MHz
Signal Rate	5760 Mbps (6 GHz)
	4320 Mbps (5 GHz)
	688 Mbps (2.4 GHz)
Transmit Power	CE: <20 dBm (2.4 GHz), <23 dBm (5 GHz, 6 GHz)
	FCC: <30 dBm (2.4 GHz, 5 GHz), <25 dBm (6 GHz)
Wireless Modes	Enable/Disable Wireless Radio, WMM
Wireless Security	WPA-PSK, WPA2-PSK, WPA3-SAE,
	WPA-PSK/WPA2-PSK, WPA2-PSK/WPA3-SAE
Other Features	MLO, DL/UL MU-MIMO, DL/UL OFDMA,
	Beamforming, Mesh



Software Features

WAN Type	Dynamic IP/Static IP/PPPoE
DHCP	Server, DHCP Client List, Address Reservation
Dynamic DNS	Compatible with 15 more DDNS Providers
Guest Network	1× 2.4 GHz Guest Network
	1× 5 GHz Guest Network
	1× 6 GHz Guest Network
NAT	Port Forwarding, Port Triggering, UPnP, DMZ
VPN	PPTP/L2TP/IPSec/OpenVPN/WireGuard/ZeroTier
Working Mode	Wi-Fi Router/ AP/RE/ WISP/Mesh
CWMP Protocol	TR069 / TR098 / TR111 / TR181
ACS Server Compatibility	GenieACS, OpenACS
TTL	Extend/Spoof/Custom
DNS	Cloudflare/Google/Quad9/Custom
VLAN	Tag VLAN / IPTV
Internet Protocols	IPv4 / IPv6
IPv6	Relay
	Dynamic (SLAAC/DHCPv6)
	Static (Fixed IP)
	Passthrough
	MAP-E (Dual-stack)
	DS-Lite (Dual-stack)

Others

Package	Wi-Fi Router
Content	Power Adapter
	RJ45 Ethernet Cable
	Quick Installation Guide
Environmental Requirements	Operating Temperature: 0 °C ~ 40 °C (32 °F ~104 °F)
	Storage Temperature: -40 °C ~ 70 °C (-40 °F ~ 158 °F)
	Operating Humidity: 10% ~ 90% non-condensing
System Requirements	Storage Humidity: 5% ~ 90% non-condensing
	Systems with wireless or wired network connectivity
	Web browser, such as Edge, Firefox, Chrome, or Safari
	Internet access subscription with ISP


cudy

Model: **RE3000**

AX3000


Dual Band Wi-Fi 6 Range Extender

-  1.3GHz Dual Core Cortex-A53 Processor
-  Extremely Fast AX3000 Wi-Fi 6 Technology
-  OFDMA, Beamforming and MU-MIMO Supported
-  3-In-1 Wi-Fi Extender/Access Point/ Add-on Mesh

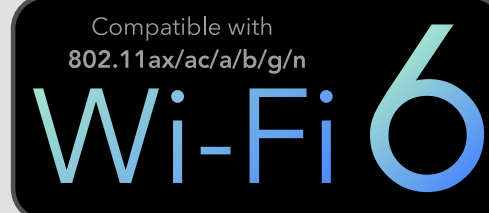

Features


- Extremely Fast AX3000 Wi-Fi 6 Technology
- 1.3GHz Dual Core Cortex-A53 Processor
- OFDMA, Beamforming and MU-MIMO Supported
- Work with any standard router or gateway
- Easily expand wireless coverage at a push of the WPS button
- Gigabit Ethernet ports to connect wired devices
- External antennas for faster and more reliable Wi-Fi
- 3-in-1 WiFi Extender / Access Point / Add-On mesh
- Easy Setup Assistant with multi-language support

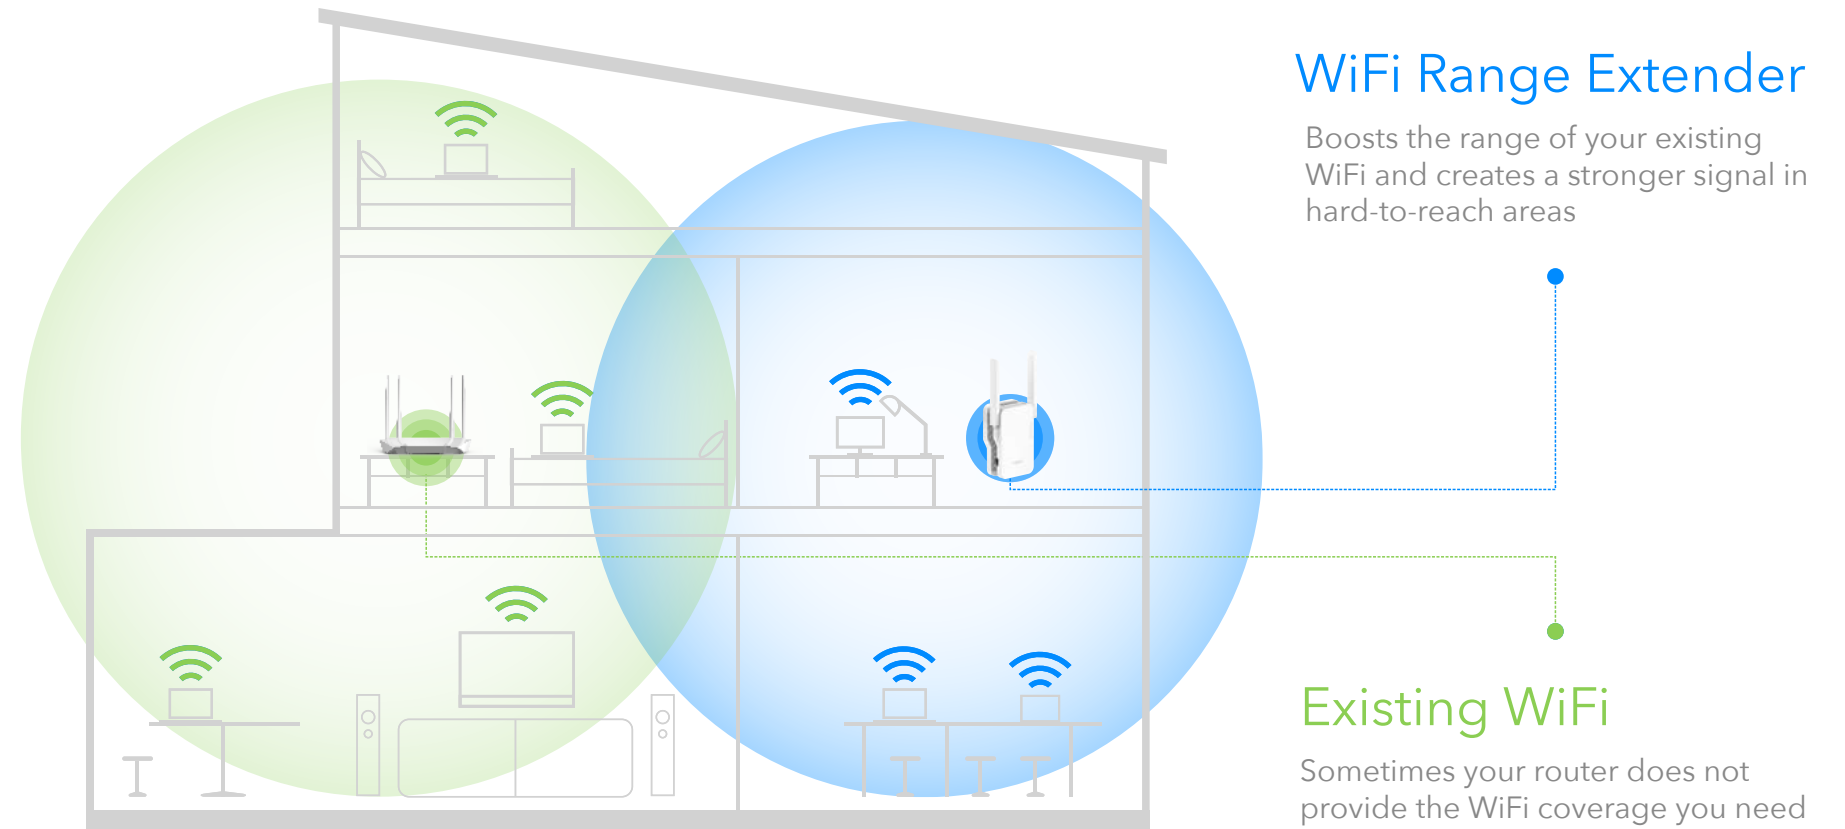

Wi-Fi Extender Mode





Access Point Mode

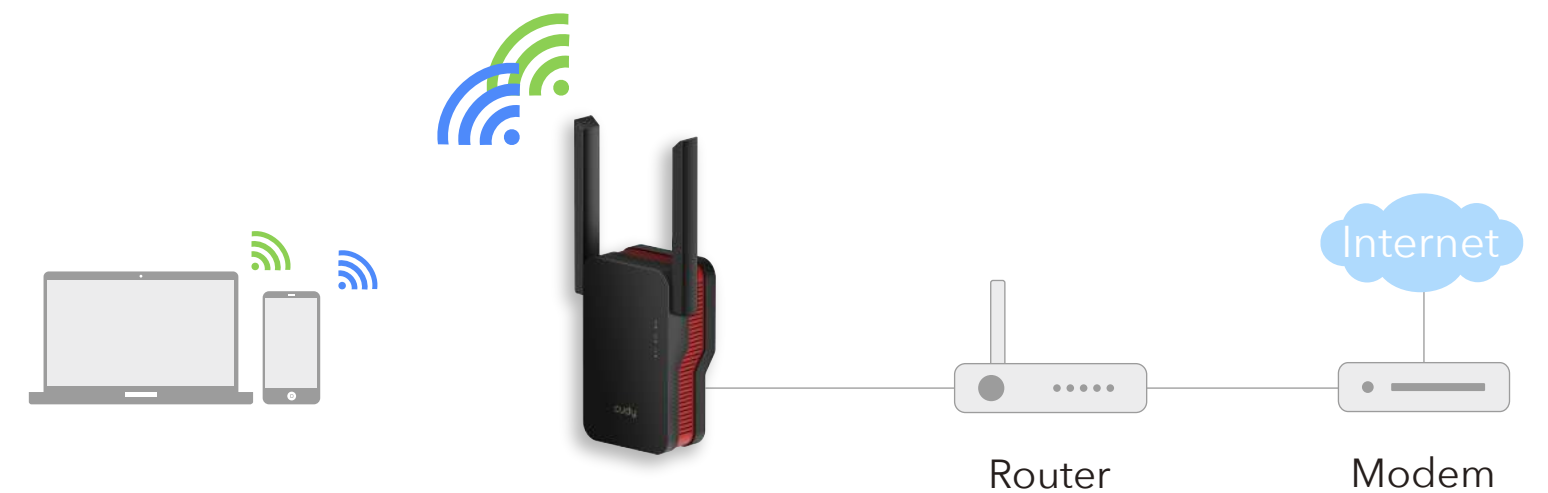



Say Goodbye to Dead Spots and Buffering

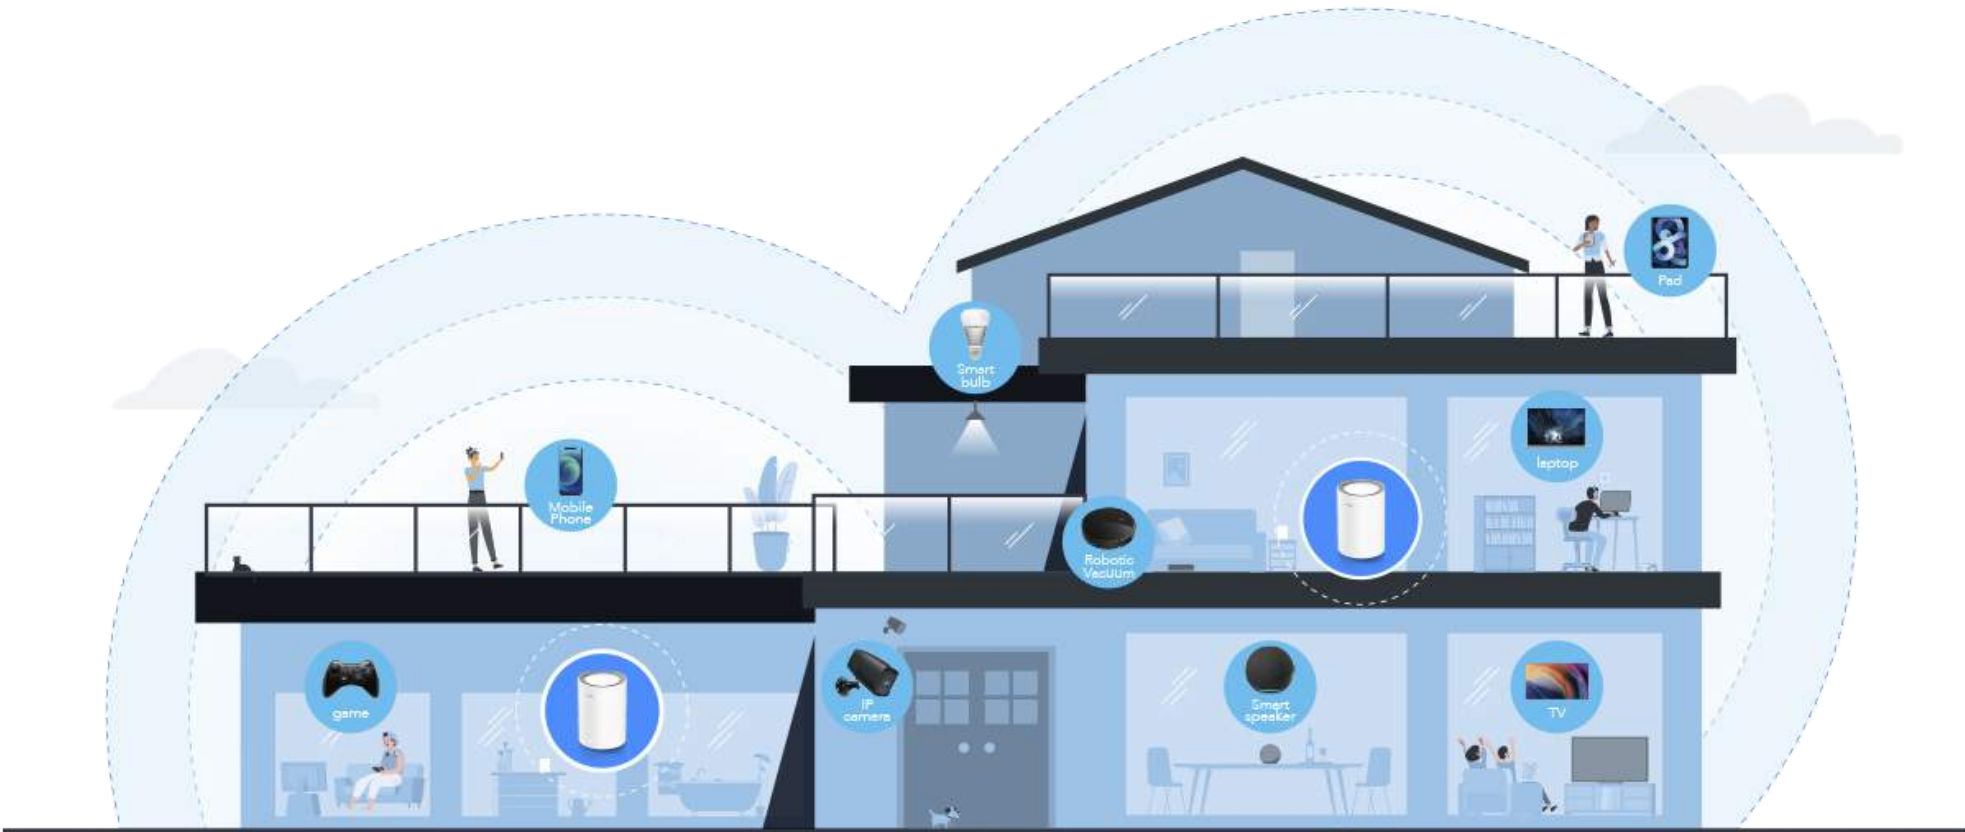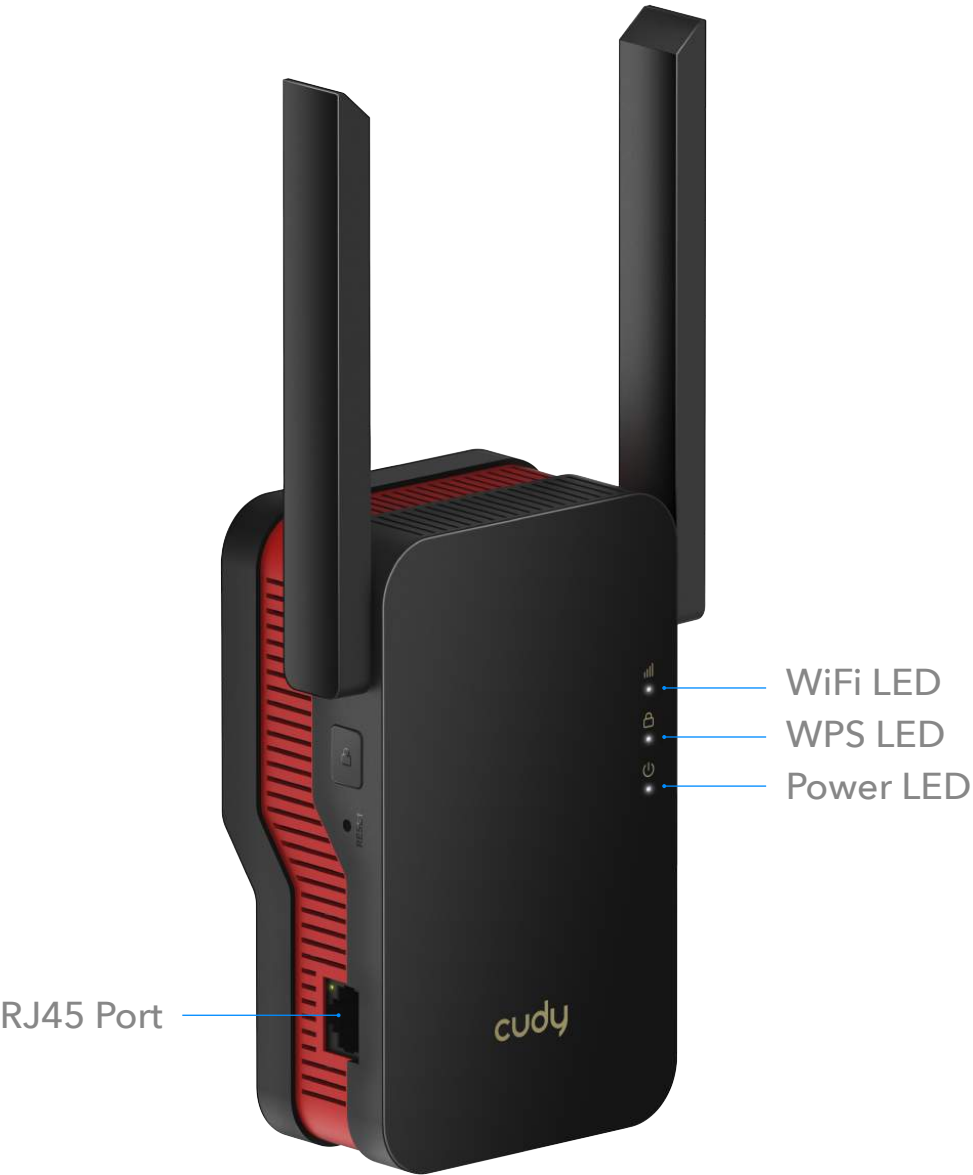

Enjoy Cudy Whole Home Mesh Wi-Fi System

4K 5GHz 2402Mbps 2.4GHz 574Mbps





Specifications

Product Name	AX3000 Dual Band Wi-Fi 6 Range Extender
Product Model	RE3000
Processor	MT7981BA+MT7976CN
Standards and Protocols	IEEE 802.11ax /IEEE 802.11ac /IEEE 802.11n/ IEEE 802.11g /IEEE 802.11a/IEEE 802.11b
Frequency	2.4GHz & 5GHz (11ax)
Bandwidth	20/40/80/160MHz
Signal Rate	5GHz: Up to 2402Mbps 2.4GHz: Up to 574Mbps
Wireless Security	WPA-PSK / WPA2-PSK / WPA3
Ports	1 10/100/1000Mbps self-adaptive LAN
Power	Direct plug-in power supply (100V-240V)
Buttons	Reset Button / WPS Button
Antenna	2*External Antennas + 1*Internal Antenna
LED Lights	WiFi / WPS / Power
Environment	Operating Temperature: 0°C~40°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing

LED and Button

LED	Colour	Status	Indication
	/	OFF	No power
	White	Flash ON	The system is booting or upgrading System startup is complete
	/	OFF	Not connected to host Wi-Fi
	White	Flash ON	WPS in progress Connected to host Wi-Fi
	OFF	Flash	No host Wi-Fi configuration
	Red Flash	ON	Not connected to host Wi-Fi
	Solid Red	ON	Connected to host Wi-Fi, signal is weak
	Solid Pink	ON	Connected to host Wi-Fi, signal is fair
	Solid White	ON	Connected to host Wi-Fi, signal is good
Reset	Long press for 2 seconds		Press and hold Reset button for 2 seconds until all the LED lights turn on and off.
WPS	Press to take effect		Press the WPS button until WPS LED start flashing.