


OM3 MULTI-MODE DUPLEX FIBRE LEADS 50µm

DESCRIPTION


These DYNAMIX OM3 multi-mode duplex fibre leads stand out for their high-quality performance & safety standards. Compliant with LSZH (Low Smoke Zero Halogen) regulations, these cables ensure minimal toxic & corrosive gas emission in case of fire, making them ideal for use in environments where safety is a priority. Each lead is covered by limited lifetime warranty, reflecting our confidence in their durability & performance. These leads are easily identifiable by their distinctive Aqua & Red colours. Perfect for a variety of networking environments, DYNAMIX's OM3 leads are designed to meet the most demanding data communication needs.

FEATURES


- 100% Tested and Certified
- Test results are supplied with every lead
- Every patch lead is tested to below 0.3dB insertion loss
- Each patch lead is serialised for traceability and ISO compliance
- All patch leads are LSZH and patch cord is RoHS compliant
- Fibre connectors are machine polished for consistent quality
- Lifetime Warranty

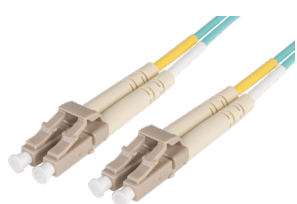


LC TO LC PATCH LEAD
AQUA

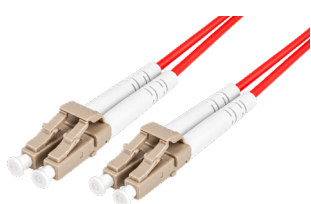


LC TO LC PATCH LEAD
RED

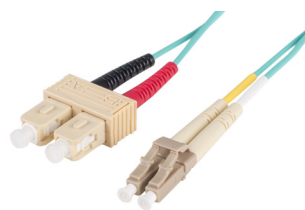


LC TO SC PATCH LEAD
AQUA

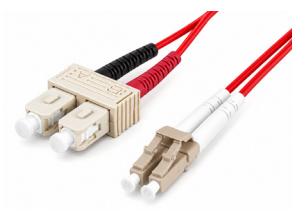


LC TO SC PATCH LEAD
RED

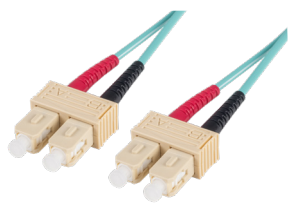

SC TO SC PATCH LEAD
AQUA

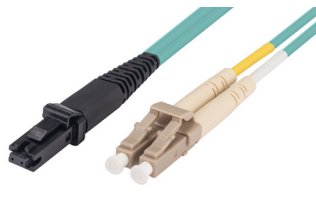

LC TO MT PATCH LEAD
AQUA

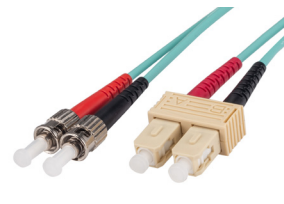

LC TO ST PATCH LEAD
AQUA


SPECIFICATIONS

Fibre diameter:	50µm
Buffer diameter:	125µm
Outer diameter:	2mm for LC, 3mm for ST, SC
Connector colour:	Beige
Fibre colour:	Aqua/Red



LENGTH	LC/LC Aqua	LC/LC Red	LC/SC Aqua	LC/SC Red	LC/MT	LC/SC	LC/ST	SC/SC	SC/ST	MT/SC
0.5m	FL-LCLC50-0	FL-LCLC50-0-RED	FL-LCSC50-0	FL-LCSC50-0-RED		FL-LCSC50-0		FL-SCSC50-0		FL-MTSC50-0
1m	FL-LCLC50-1	FL-LCLC50-1-RED	FL-LCSC50-1	FL-LCSC50-1-RED		FL-LCSC50-1		FL-SCSC50-1		
1.5m	FL-LCLC50-1H	FL-LCLC50-1H-RED	FL-LCSC50-1H	FL-LCSC50-1H-RED						
2m	FL-LCLC50-2	FL-LCLC50-2-RED	FL-LCSC50-2	FL-LCSC50-2-RED		FL-LCSC50-2		FL-SCSC50-2		
3m	FL-LCLC50-3	FL-LCLC50-3-RED	FL-LCSC50-3	FL-LCSC50-3-RED		FL-LCSC50-3		FL-SCSC50-3		
5m	FL-LCLC50-5		FL-LCSC50-5		FL-LCMT50-5	FL-LCSC50-5	FL-LCST50-5	FL-SCSC50-5	FL-SCST50-5	
7.5m	FL-LCLC50-7H		FL-LCSC50-7H			FL-LCSC50-7H		FL-SCSC50-7H		
10m	FL-LCLC50-10		FL-LCSC50-10		FL-LCMT50-10	FL-LCSC50-10	FL-LCST50-10	FL-SCSC50-10	FL-SCST50-10	
15m	FL-LCMT50-15		FL-LCSC50-15			FL-LCSC50-15		FL-SCSC50-15		
20m	FL-LCLC50-20		FL-LCSC50-20		FL-LCMT50-20	FL-LCSC50-20	FL-LCST50-20	FL-SCSC50-20	FL-SCST50-20	
30m	FL-LCLC50-30					FL-LCSC50-30	FL-LCST50-30	FL-SCSC50-30	FL-SCST50-30	

SINGLE-MODE VS MULTI-MODE

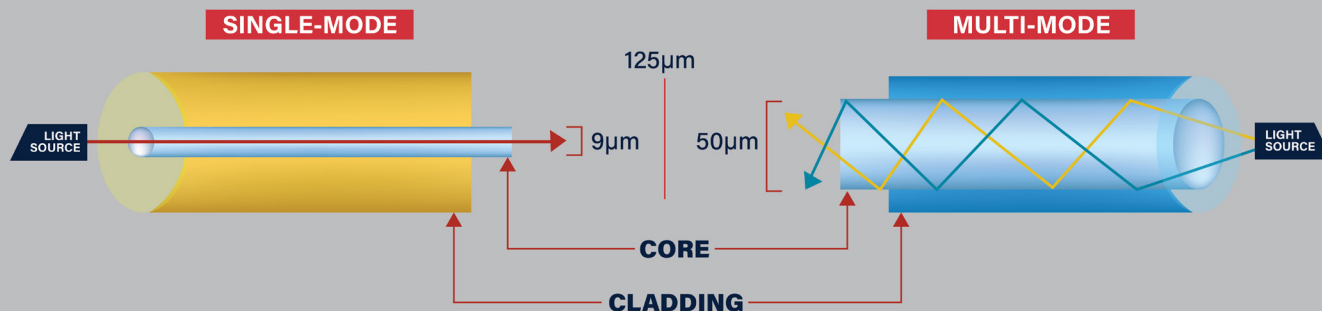

Please note we took the up-most care to compile the information in this datasheet. To the best of our knowledge all info provided were correct at the time of creation. Should any specs change we try to update info accordingly. Information are subject to change without notice. In the case that you find any irregularity please inform our team at contactus@dynamix.co.nz

Last updated: 01 July 2026

01072026/NDLKJP



www.dynamix.co.nz