



Model: WR3600H

BE3600

2.5G Wi-Fi 7 Router



Easy Setup with
Cudy App





Highlights

A dual-band WiFi 7 router with an aggregate of 3.6 Gbps speed, one 2.5G WAN, and four Gigabit LAN, catering to multi-Gig internet access, gaming, and entertainment scenarios.

- 4-Stream Dual-Band Wi-Fi 7
- 2880 Mbps + 688 Mbps Wi-Fi
- 1× 2.5GbE and 4× GbE
- Covers 120 m² (1,300 ft²)
- WireGuard, OpenVPN, ZeroTier, etc
- Cudy App, Cloud Control

Package Content

- WR3600H
- Power Adapter
- Ethernet Cable
- Installation Guide

Hardware Features

CPU	Chipset	BCM6764
	CPU Details	2.0 GHz Quad-Core, ARM Cortex-A7
Memory /Storage	Flash/ROM	128 MB (1 Gbit) NAND
	DDR/RAM	512 MB (4 Gbit) DDR3L
Wireless	5 GHz Wi-Fi Speed	2880 Mbps
	2.4 GHz Wi-Fi Speed	688 Mbps
	5 GHz Wi-Fi Streams	2T2R (2×2 MIMO)
	2.4 GHz Wi-Fi Streams	2T2R (2×2 MIMO)
	Wi-Fi Antennas	4x Fixed
	5 GHz Antenna Gain Max	5.5dBi
	2.4 GHz Antenna Gain Max	5.4dBi
	FEM or PA/LNA	5 GHz: 2× External
		2.4 GHz: 2× External
	Beamforming	True
	Range Performance	Max: 240 m (787 ft)
		Indoor WiFi range varies depending on the layout and wall materials.
	Wall Performance	Two wooden walls with thickness < 10 cm (4")
		One concrete wall with thickness < 20 cm (7")
		or two concrete walls with thickness < 10 cm (4")



Hardware Specs

Interfaces	2.5G RJ45 Ports	1
	Gigabit RJ45 Ports	4
	Ethernet Notes	The 2.5G port is WAN port, the Gigabit ports are LAN ports
	LED	Power
		Internet
		WAN
		LAN
	Physical Buttons	2.4 GHz Wi-Fi
		5 GHz Wi-Fi
		WPS Button
		Reset Button
Power	Power Input	DC Jack
	Power Methods	DC
	DC	12V 1A
	Power Adapter	Input: 100 ~ 240 V, 50/60 Hz AC Output: 12V 1A DC
	Max Power Consumption(W)	10W
Reliability	Environment	Operating Temperature: 0 °C ~ 40 °C (32 °F ~104 °F)
		Storage Temperature: -40 °C ~ 70 °C (-40 °F ~ 158 °F)
		Humidity: 10% ~ 90% non-condensing
		Storage Humidity: 5% ~ 95% non-condensing

Mechanical	Installation	Desktop
		Wall-mount
	Dimension	183.3×109×38 mm 7.22×4.29×1.5 inches

Software Specs

*Available with later firmware upgrade.

Wireless	Wi-Fi Standards	Wi-Fi 7
	Max Wi-Fi Modulation	4K-QAM
	Wi-Fi Efficiency	MLO
		MRU
		Puncturing
		OFDMA
		MU-MIMO
		BSS Color
	Max Capacity	512
	Recommended Client Upper Limit	200
	Max Wi-Fi Channel Width	160 MHz
	Wi-Fi Security	WPA/WPA2/WPA3
	Guest Network	2.4 GHz, 5 GHz
	WPS	True
General	Operation Modes	Wi-Fi Router
		Access Point
		Range Extender*
		WISP*
		Client*



Software Specs

*Available with later firmware upgrade.

General	Mesh*	Cudy Mesh
	Mesh Backhaul*	Wireless Backhaul
		Wired Backhaul
	Multi-Band Backhaul*	true
	WAN Mode	DHCP
		Static IP
		PPPOE
Network	Internet Failover Sequence	WAN
		WISP
	QoS	Per-User Rate Limiting
	DHCP	Address Reservation
		DHCP Client List
		Server
	IP Versions	IPv4/IPv6
	IPv6 Protocols	Relay
		Dynamic (SLAAC/DHCPv6)
		Staic (Fixed IP)
		Passthrough
		464XLAT
		MAP-E
		DS-Lite
	IPTV/VLAN	Bridge
		Tag VLAN

Network	TTL Customization	Extend
		Spoof
		Custom
	IGMP	IGMP Proxy
		IGMP Snooping
	Forwarding	Port Forwarding
		Port Triggering
		UPnP
		DMZ
	Firewall	SPI Firewall
		DoS Protection
		Block PING
	Application Layer Gateway	IPSec Passthrough
		L2TP Passthrough
		PPTP Passthrough
		FTP Passthrough
		TFTP Passthrough
		H323 Passthrough
Utilities	VPN Server	SIP Passthrough
		RTSP Passthrough
		WireGuard
		OpenVPN
		IPsec
		Zerotier
		PPTP
		L2TP



Software Specs

Utilities	VPN Client	WireGuard
		OpenVPN
		IPsec
		Zerotier
		PPTP
		L2TP
	DNS Options	DNS over TLS
		Manual DNS
		Rebind Protection
		Override Clients' DNS
	DNS over TLS Providers	Cloudflare
		Google
		Quad9
		Custom
Management	Wake on LAN	True
	Online Detection	True
	All Devices Management	Wi-Fi Time Schedule
		MAC Filter
		IP/MAC Binding
	Per-Devices Management	Intenent On/Off
		VPN On/Off
		Online Time Schedule
		Device Rename
	Content Management	Domain Filter
		IP Filter

System	Local Control Method	Config Web Page
		App Control
	Remote Control Method	Config Page via HTTPS
		App Control
		TR069/TR098/TR111/TR181
	Firmware Upgrade	Local Update
		App (Over the Air)
		Online Update
	Reliability	Timed Reboot
		Backup and Restore
	Diagnostic Tools	Diagnosis
		Ping
		Traceroute
		NSLookup
		System Log
	Languages	• English • Bengali • Catalan • Czech
		• German • Greek • Spanish • French
		• Hebrew • Italian • Croatian • Hungarian
		• Khmer • Korean • Dutch • Japanese
		• Russian • Slovak • Swedish • Romanian
		• Turkish • Vietnamese • Thai • Ukrainian
		• Polish • Norwegian • Portuguese
		• Simplified Chinese • Traditional Chinese



Software Specs


Dashboard	Panel	Internet Status
		Mesh Status
		Devices Management
		WAN Status
		LAN Status
		WISP Status
		Wi-Fi Status
		VPN Status
		DHCP Server Status
		System Version
	Charts	Mesh Topology
		Internet Speed
		WISP Speed
		Wi-Fi Speed

Model: **RE3000**

AX3000


Dual Band Wi-Fi 6 Range Extender

-  1.3GHz Dual Core Cortex-A53 Processor
-  Extremely Fast AX3000 Wi-Fi 6 Technology
-  OFDMA, Beamforming and MU-MIMO Supported
-  3-In-1 Wi-Fi Extender/Access Point/ Add-on Mesh

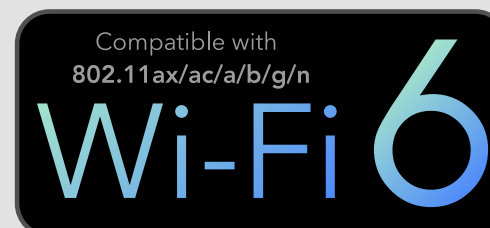

Features


- Extremely Fast AX3000 Wi-Fi 6 Technology
- 1.3GHz Dual Core Cortex-A53 Processor
- OFDMA, Beamforming and MU-MIMO Supported
- Work with any standard router or gateway
- Easily expand wireless coverage at a push of the WPS button
- Gigabit Ethernet ports to connect wired devices
- External antennas for faster and more reliable Wi-Fi
- 3-in-1 WiFi Extender / Access Point / Add-On mesh
- Easy Setup Assistant with multi-language support

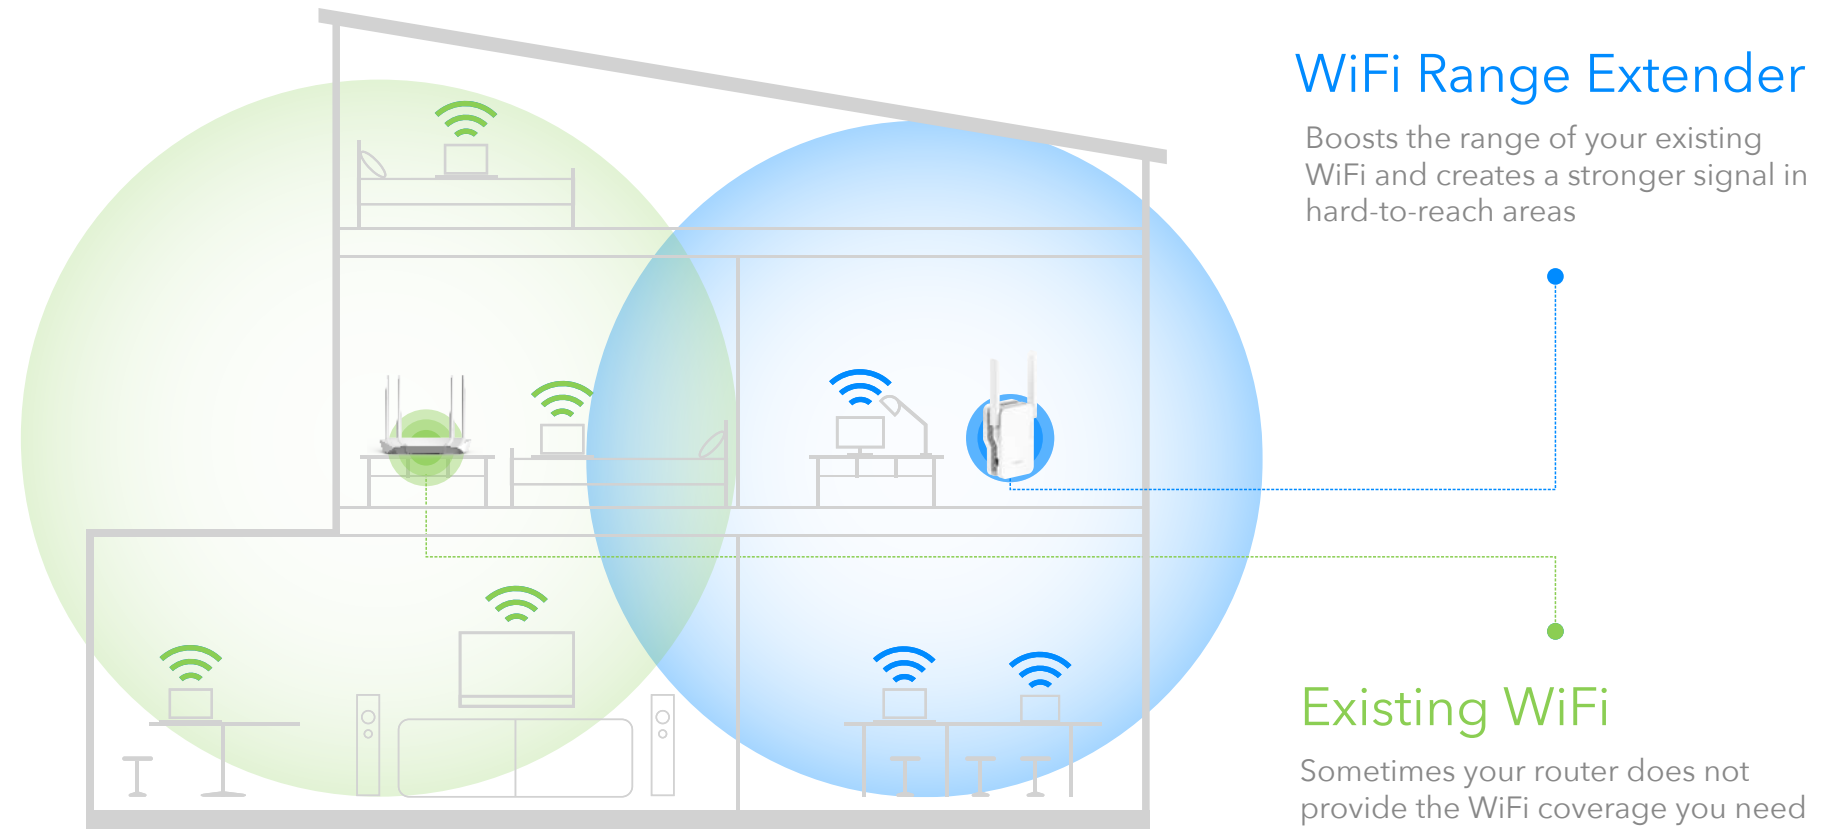

Wi-Fi Extender Mode





Access Point Mode

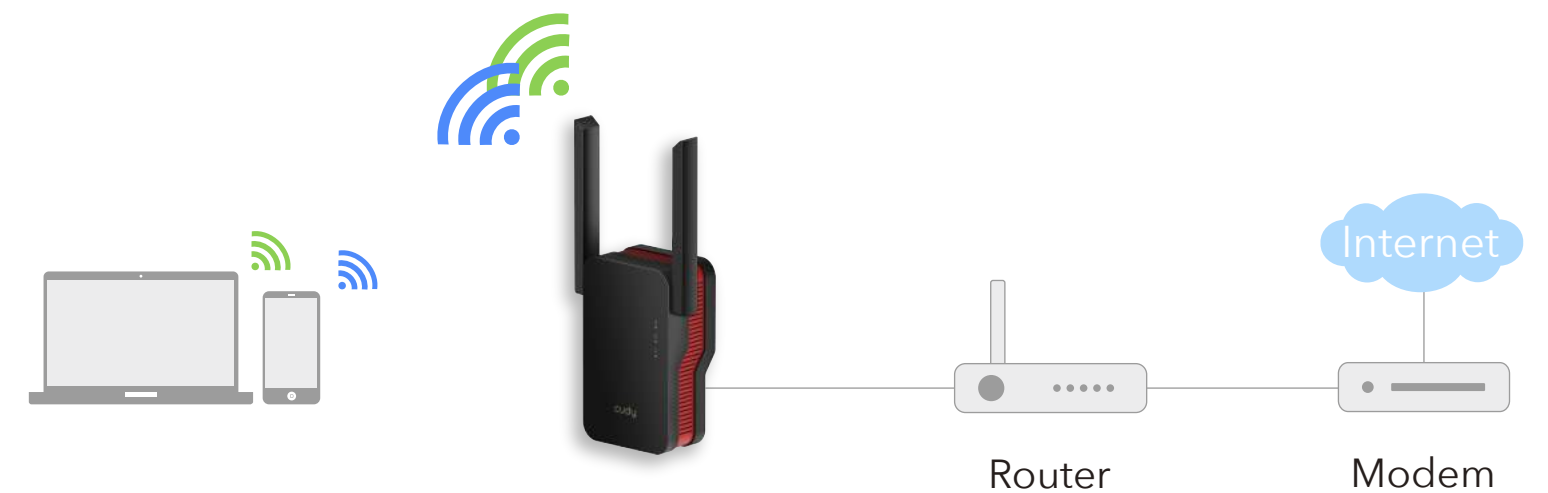



Say Goodbye to Dead Spots and Buffering

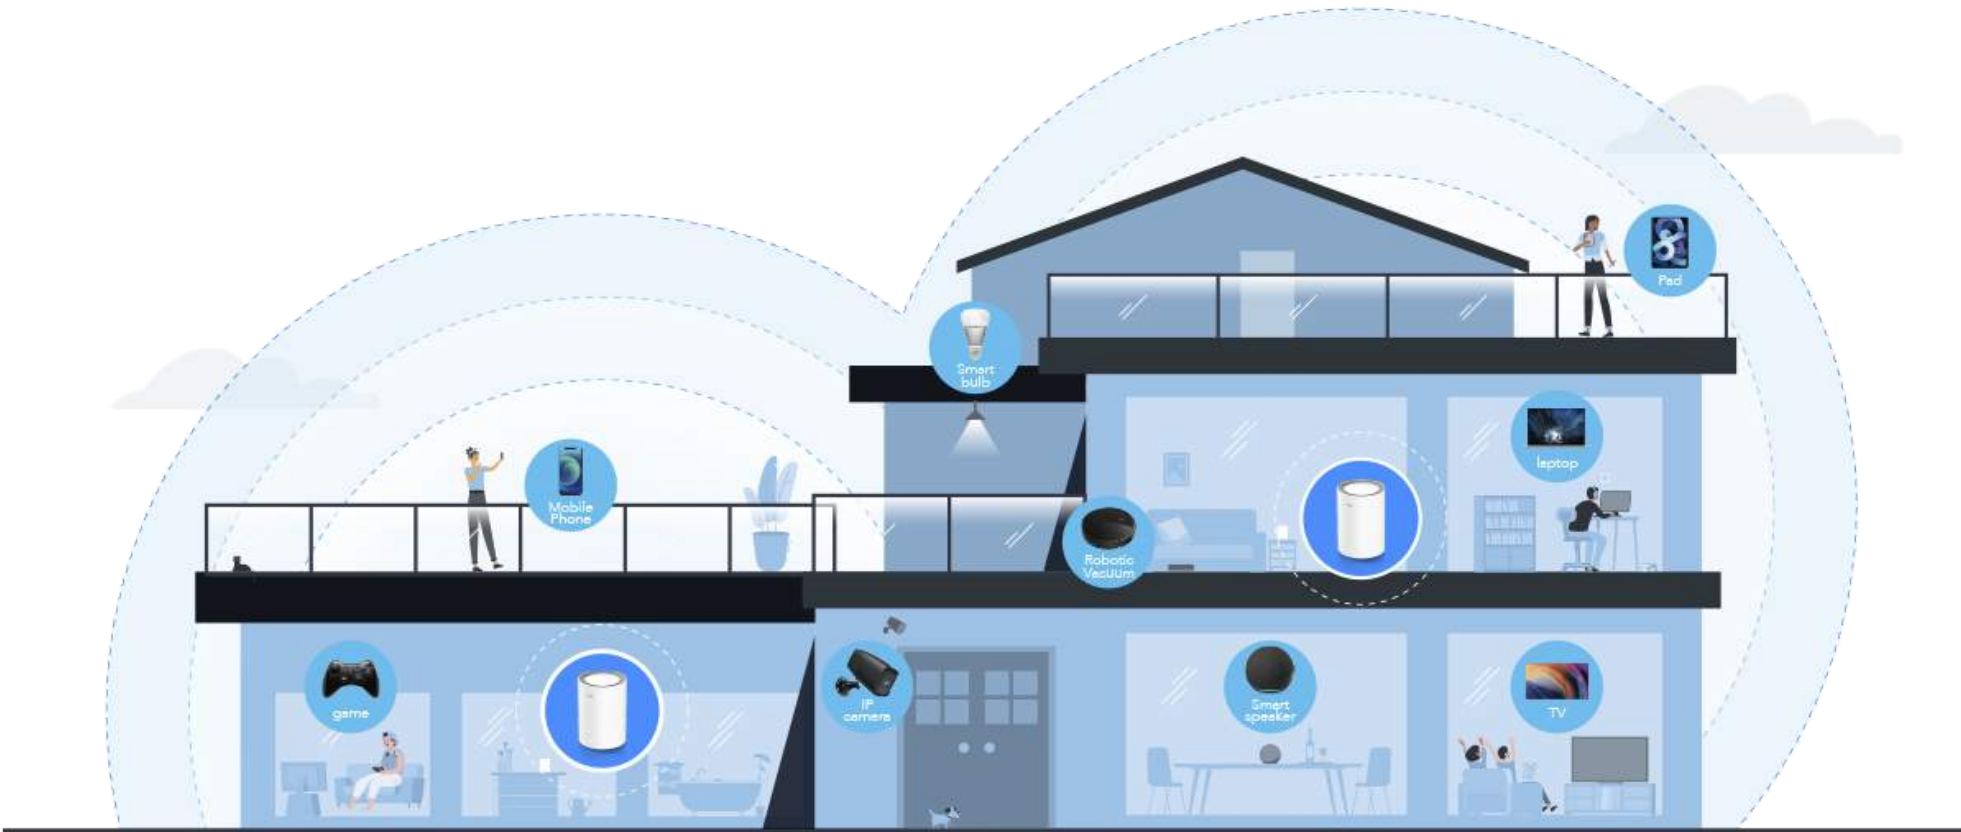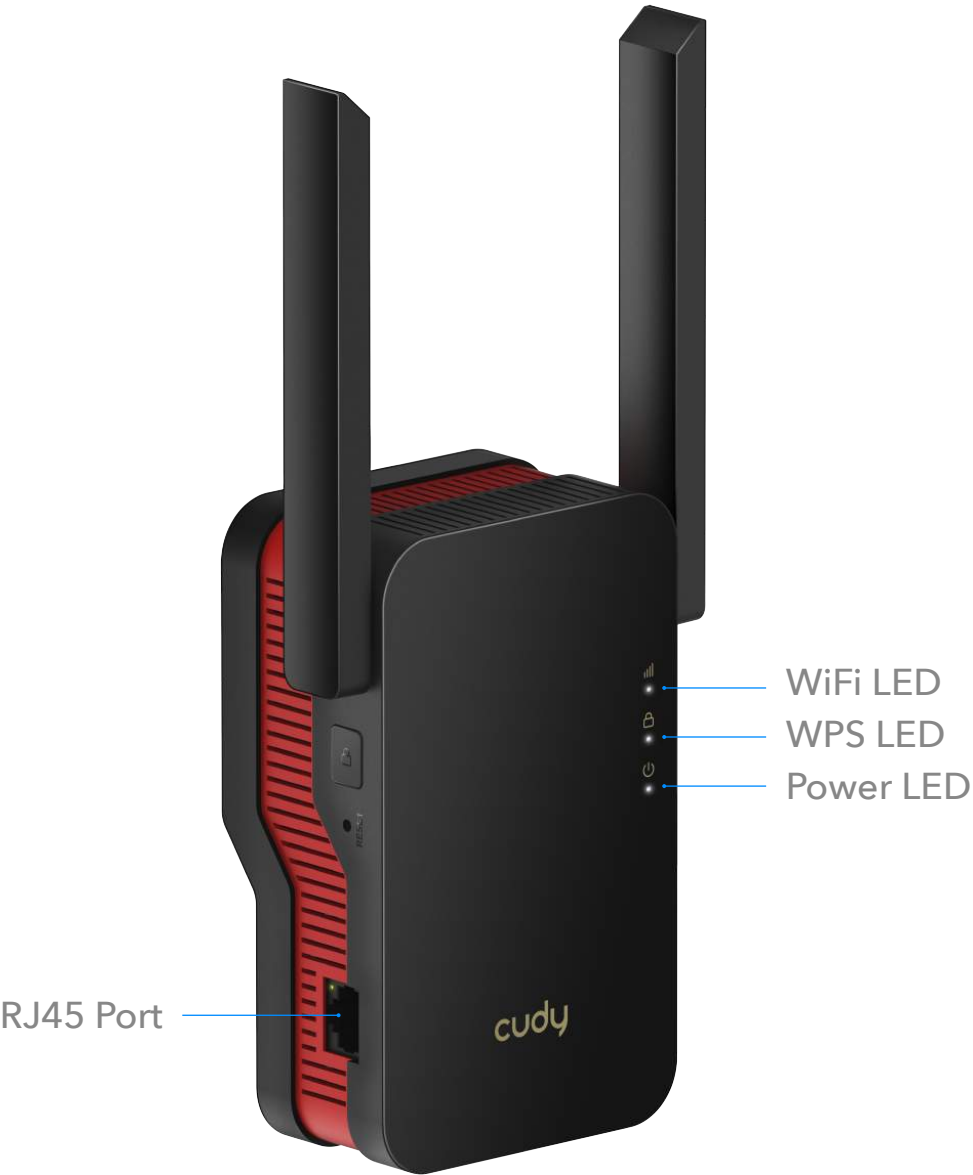

Enjoy Cudy Whole Home Mesh Wi-Fi System

4K 5GHz 2402Mbps
2.4GHz 574Mbps





Specifications

Product Name	AX3000 Dual Band Wi-Fi 6 Range Extender
Product Model	RE3000
Processor	MT7981BA+MT7976CN
Standards and Protocols	IEEE 802.11ax /IEEE 802.11ac /IEEE 802.11n/ IEEE 802.11g /IEEE 802.11a/IEEE 802.11b
Frequency	2.4GHz & 5GHz (11ax)
Bandwidth	20/40/80/160MHz
Signal Rate	5GHz: Up to 2402Mbps 2.4GHz: Up to 574Mbps
Wireless Security	WPA-PSK / WPA2-PSK / WPA3
Ports	1 10/100/1000Mbps self-adaptive LAN
Power	Direct plug-in power supply (100V-240V)
Buttons	Reset Button / WPS Button
Antenna	2*External Antennas + 1*Internal Antenna
LED Lights	WiFi / WPS / Power
Environment	Operating Temperature: 0°C~40°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing

LED and Button

LED	Colour	Status	Indication
	/	OFF	No power
	White	Flash ON	The system is booting or upgrading System startup is complete
	/	OFF	Not connected to host Wi-Fi
	White	Flash ON	WPS in progress Connected to host Wi-Fi
	OFF	Flash	No host Wi-Fi configuration
	Red Flash	ON	Not connected to host Wi-Fi
	Solid Red	ON	Connected to host Wi-Fi, signal is weak
	Solid Pink	ON	Connected to host Wi-Fi, signal is fair
	Solid White	ON	Connected to host Wi-Fi, signal is good
Reset	Long press for 2 seconds		Press and hold Reset button for 2 seconds until all the LED lights turn on and off.
WPS	Press to take effect		Press the WPS button until WPS LED start flashing.