




Model: WR6500

BE6500

Gigabit Wi-Fi 7 Router



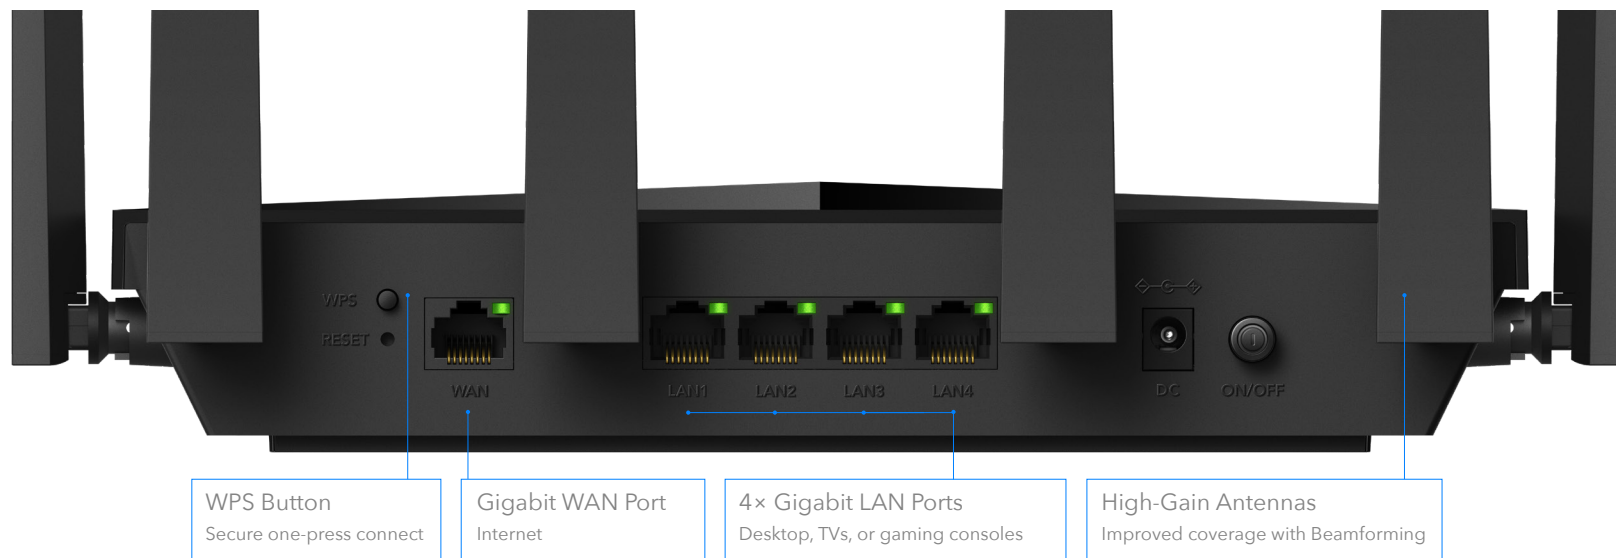

Supercharged Speed. Blazing-Fast Wi-Fi.

For the first time, MLO in Wi-Fi 7 connects clients through multiple bands simultaneously, aggregating the speed and making congestion on any single band insensible. In addition, the 4K-QAM boosts speed by another 20%, delivering a total of 2.7X faster speed for smoother experience in larger homes.



Versatile Management



Parental Control

Set up profiles with corresponding policies to establish a safer network for your loved ones.



VPN Client and Server

Connect and share a VPN or establish your own server to secure remote access.



IPTV

Includes Tag VLAN to support assigning IPTV/VoIP ports. IGMP snooping improves IPTV network efficiency.



IPv6

Support the IPv6 services by your ISP and browse the IPv6 websites with faster performance.



Cudy APP Control

Manage your network right on your phone. This device supports cloud remote management.



QoS

Set speed limits for certain clients to prioritize your gaming rigs and other important devices.


Immersive Gaming with Lower Latency

The enhanced OFDMA with multi-RU and puncturing utilize non-busy frequency resource unit to fit more connections at the same time.



Powerful Wi-Fi 7 Chip for Responsive Network

The next-gen Wi-Fi 7 Broadcom CPU with fabulous efficiency processes more tasks instantly, keeping network super-capable and responsive.

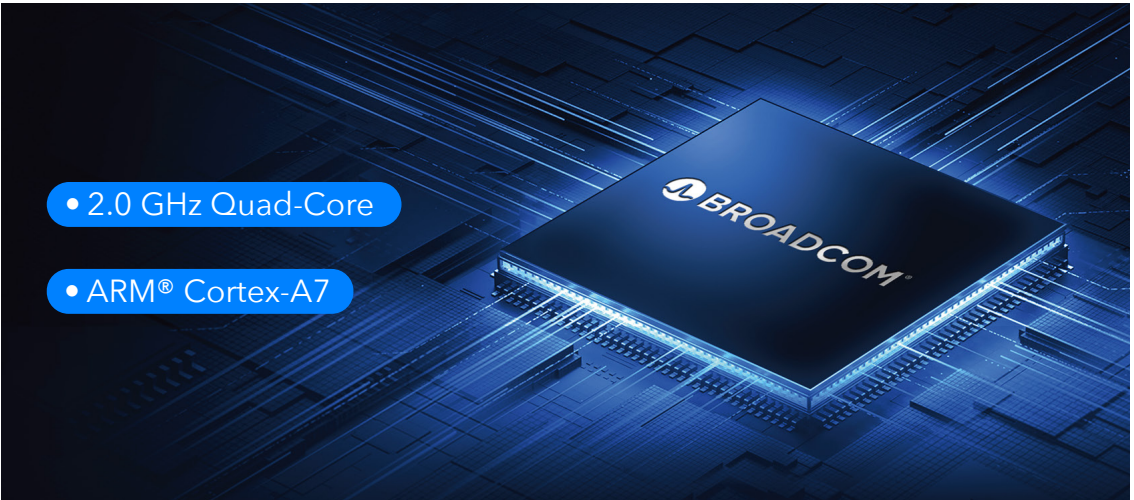



Highlights

A dual-band WiFi 7 router with an aggregate of 6.5 Gbps speed, and five Gigabit ports, catering to super-fast internet access, gaming, and entertainment scenarios.

- Broadcom 2 GHz Quad-Core CPU
- 6-Stream Dual-Band Wi-Fi 7
- 5760 Mbps + 688 Mbps Wi-Fi
- 5× Gigabit Ethernet Ports
- 200 Connected Devices
- Covers 140 m² (1,500 ft²)
- Cudy Mesh, VPN Server and Client
- Cudy App, Cloud Control

Package Content

- WR6500
- Power Adapter
- Ethernet Cable
- Installation Guide

Hardware Specs

CPU	Chipset	BCM6766
	CPU Details	2.0 GHz Quad-core, ARM Cortex-A7
Memory/Storage	Flash/ROM	128 MB (1 Gbit) NAND
	DDR/RAM	512 MB (4 Gbit) DDR4
Wireless	5 GHz Wi-Fi Speed	5765 Mbps
	2.4 GHz Wi-Fi Speed	688 Mbps
	5 GHz Wi-Fi Streams	4T4R (4×4 MIMO)
	2.4 GHz Wi-Fi Streams	2T2R (2×2 MIMO)
	Wi-Fi Antennas	6× Fixed
	5 GHz Antenna Gain Max	5.27dBi
	2.4 GHz Antenna Gain Max	5.19dBi
	FEM or PA/LNA	5 GHz: 4× External
		2.4 GHz: 2× External
	Beamforming	True
	Range Performance	Max: 240 m (787 ft)
		Indoor WiFi range varies depending on the layout and wall materials. See Wall
		Performance spec for placement suggestions.
	Wall Performance	Two wooden walls with thickness < 10 cm (4")
		One concrete wall with thickness < 20 cm (7")
		or two concrete walls with thickness < 10 cm (4")



Hardware Specs

Interfaces	Gigabit RJ45 Ports	5
	Ethernet Notes	1× WAN port, the rest are LAN ports
	LED	System
		Internet
		Wi-Fi
		WPS
	Physical Buttons	Power On/Off Button
		WPS Button
		Reset Button
	Power Input	DC Jack
Power	Power Methods	DC
	DC	12V 1.5A
	Power Adapter	Input: 100 ~ 240 V, 50/60 Hz AC
		Output: 12V 1.5A DC
	Max Power Consumption (W)	17W
Reliability	Environment	Operating Temperature:
		0 °C ~ 40 °C (32 °F ~104 °F)
		Storage Temperature:
		-40 °C ~ 70 °C (-40 °F ~ 158 °F)
		Humidity: 10% ~ 90% non-condensing
		Storage Humidity: 5% ~ 95% non-condensing

Certifications	FCC, CE	
Mechanical	Installation	Desktop
		Wall-mount
	Dimension	253×152.5×48.2 mm
		9.96×6×1.9 inches
	Product Weight	
	580.0 g (20.46 oz.)	
Ordering Information	Retail Package Weight	EU: 1190.0 g (41.98 oz.)
	Retail Package Dimension	431×324×58 mm
		16.97×12.76×2.28 inches
	Units per Carton	8
	Carton Dimension	49.2×44.5×34.4 cm
		19.37×17.52×13.54 inches
	Carton Gross Weight	EU: 10.5 kg (23.15 lbs)
	Carton Net Weight	EU: 9.5 kg (20.94 lbs)



Software Specs

Wireless	Wi-Fi Standards	Wi-Fi 7
	Max Wi-Fi Modulation	4K-QAM
	Wi-Fi Efficiency	MLO
		MRU
		Puncturing
		OFDMA
		MU-MIMO
		BSS Color
	Max Capacity	512
	Recommended Client Upper Limit	200
	Max Wi-Fi Channel Width	160 MHz
	Wi-Fi Security	WPA/WPA2/WPA3
	Guest Network	2.4 GHz, 5 GHz
General	WPS	True
	Operation Modes	Wi-Fi Router
		Access Point
		Range Extender
	Mesh	Cudy Mesh
	Mesh Backhaul	Wireless & Wired Backhaul
	Multi-Band Backhaul	True
	WAN Mode	DHCP, Static IP, PPPOE
		PPTP, L2TP

Network	QoS	Per-User Rate Limiting
	DHCP	Address Reservation
		DHCP Client List
		Server
	IP Versions	IPv4/IPv6
	IPv6 Protocols	Relay
		Dynamic (SLAAC/DHCPv6)
		Static (Fixed IP)
		Passthrough
		464XLAT
		MAP-E
		DS-Lite
	IPTV/VLAN	Bridge
		Tag VLAN
		VoIP VLAN
		IPTV VLAN
	TTL Customization	Extend
		Spoof
		Custom
	IGMP	IGMP Proxy
		IGMP Snooping



Software Specs

Network	Forwarding	Port Forwarding
		Port Triggering
		UPnP
		DMZ
	Firewall	SPI Firewall
		DoS Protection
		Block PING
	Application Layer Gateway	IPSec Passthrough
		L2TP Passthrough
		PPTP Passthrough
		FTP Passthrough
		TFTP Passthrough
		H323 Passthrough
		SIP Passthrough
		RTSP Passthrough
Utilities	VPN Server	WireGuard
		OpenVPN
		IPsec
		Zerotier
		PPTP
		L2TP

Utilities	VPN Client	WireGuard
		OpenVPN
		IPsec
		Zerotier
		PPTP
		L2TP
	DNS Options	DNS over TLS
		Manual DNS
		Rebind Protection
	DNS over TLS Providers	Override Clients' DNS
		Cloudflare
		Google
		Quad9
		Custom
	Wake on LAN	True
		True
Management	All Devices Management	Wi-Fi Time Schedule
		MAC Filter
		IP/MAC Binding
	Per-Devices Management	Internet On/Off
		VPN On/Off
		Online Time Schedule
		Device Rename



Software Specs

System	LED Control	True
	Local Control Method	Config Web Page App Control
Remote Control Method	Config Page via HTTPS App Control TR069/TR098/TR111/TR181	
Firmware Upgrade	Local Update App (Over the Air) Online Update	
Reliability	Timed Reboot Backup and Restore	
Diagnostic Tools	Diagnosis	
	Ping	
	Traceroute	
	NSLookup	
	System Log	
Languages	• English • Bengali • Catalan • Czech • German • Greek • Spanish • French • Hebrew • Italian • Croatian • Hungarian • Khmer • Korean • Dutch • Japanese • Russian • Slovak • Swedish • Romanian	

System	Languages	• Turkish • Vietnamese • Thai • Ukrainian
		• Polish • Norwegian • Portuguese
		• Simplified Chinese • Traditional Chinese
Dashboard	Panel	Internet Status
		Devices Management
		WAN Status
		LAN Status
		Wi-Fi Status
		VPN Status
		DHCP Server Status
		System Version
	Charts	Internet Speed
		Wi-Fi Speed


cudy

Model: **RE3000**

AX3000


Dual Band Wi-Fi 6 Range Extender

-  1.3GHz Dual Core Cortex-A53 Processor
-  Extremely Fast AX3000 Wi-Fi 6 Technology
-  OFDMA, Beamforming and MU-MIMO Supported
-  3-In-1 Wi-Fi Extender/Access Point/ Add-on Mesh

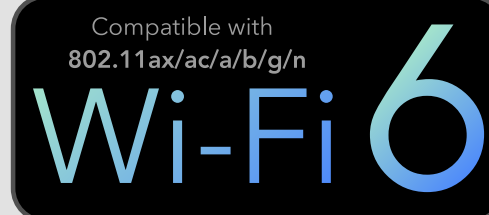

Features


- Extremely Fast AX3000 Wi-Fi 6 Technology
- 1.3GHz Dual Core Cortex-A53 Processor
- OFDMA, Beamforming and MU-MIMO Supported
- Work with any standard router or gateway
- Easily expand wireless coverage at a push of the WPS button
- Gigabit Ethernet ports to connect wired devices
- External antennas for faster and more reliable Wi-Fi
- 3-in-1 WiFi Extender / Access Point / Add-On mesh
- Easy Setup Assistant with multi-language support

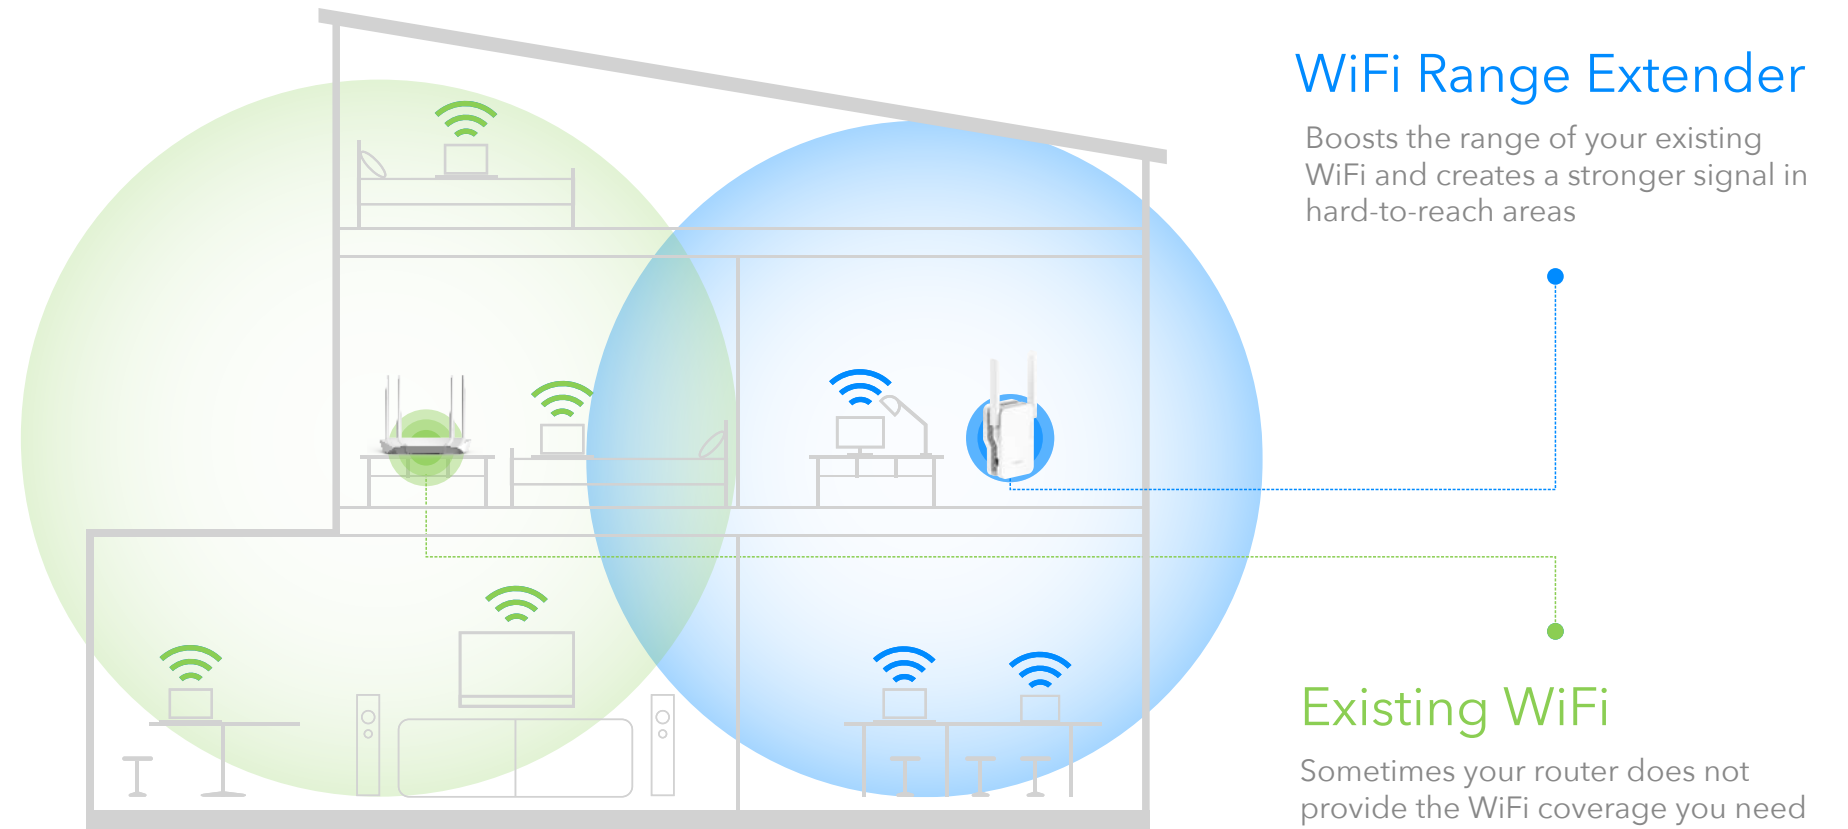

Wi-Fi Extender Mode





Access Point Mode

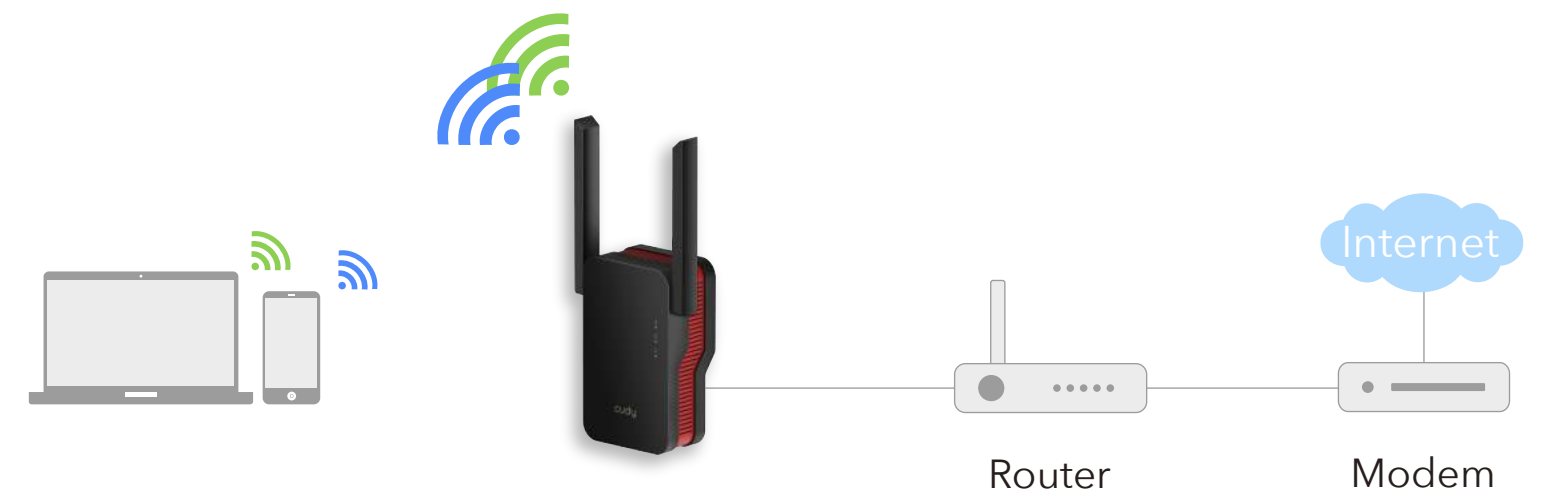



Say Goodbye to Dead Spots and Buffering

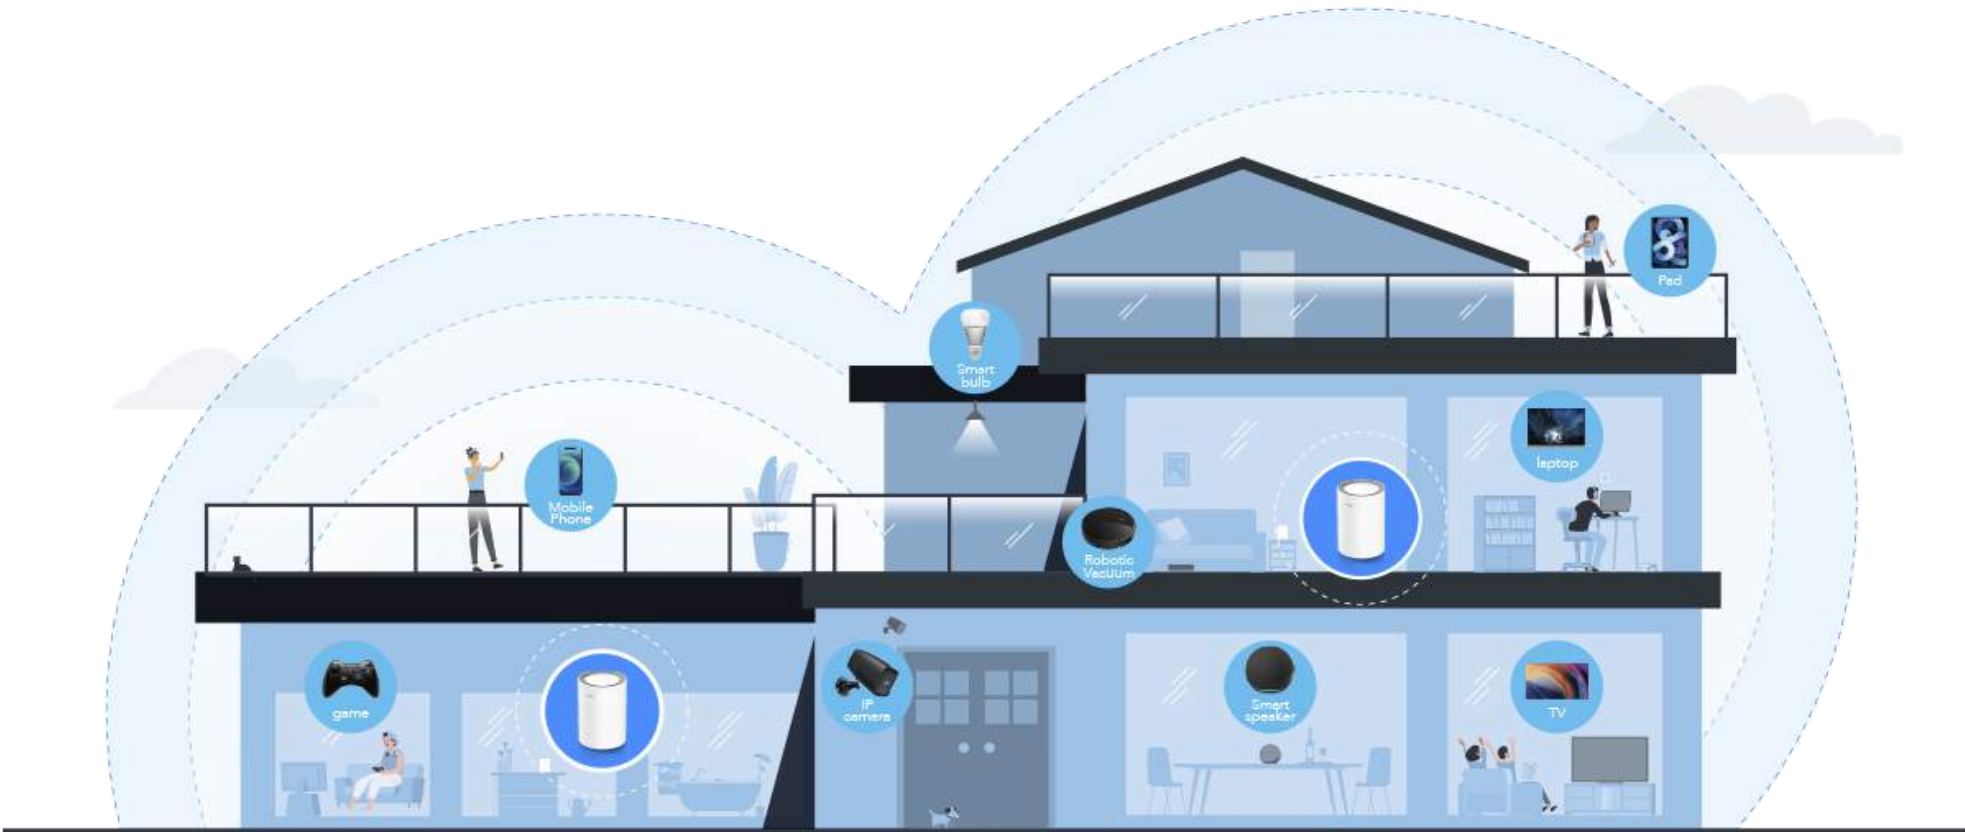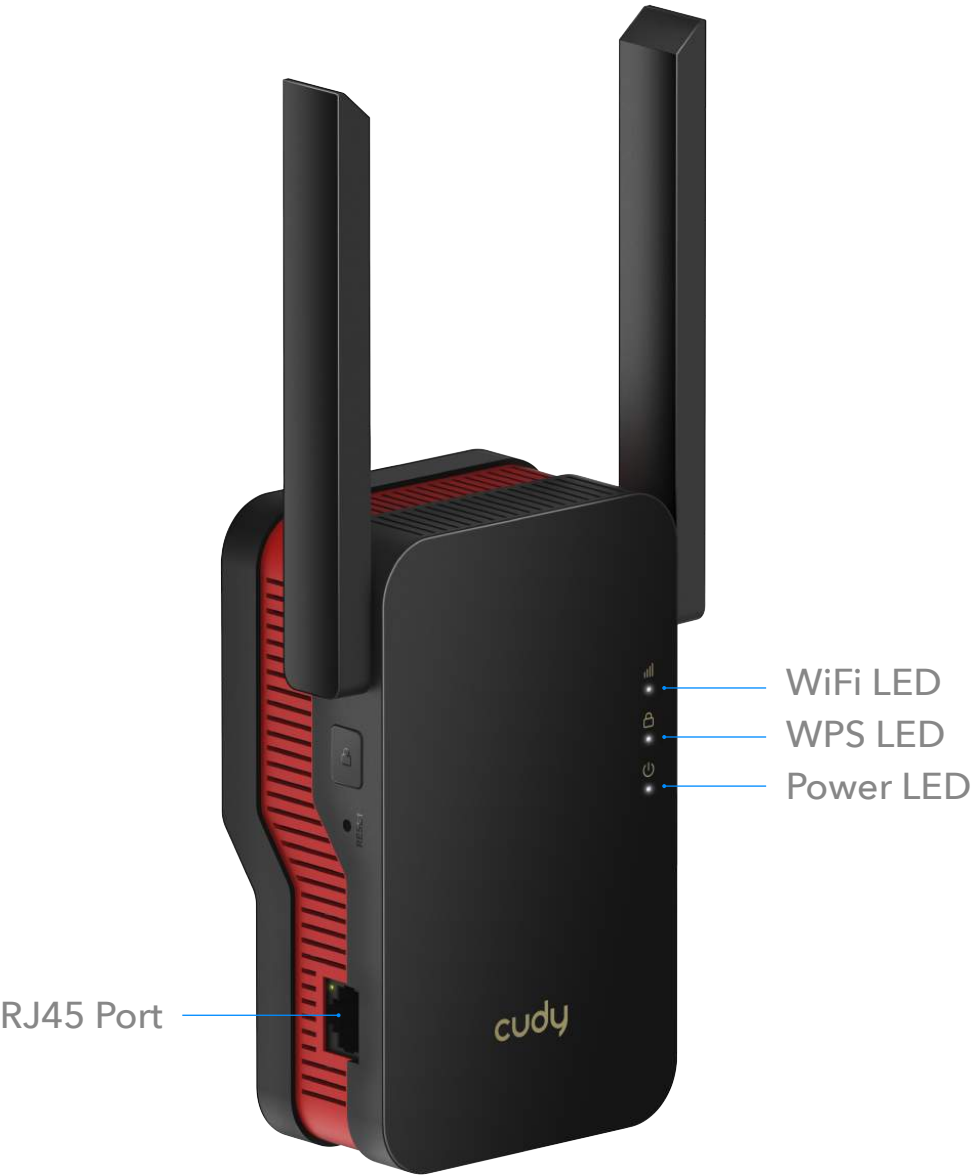

Enjoy Cudy Whole Home Mesh Wi-Fi System

4K 5GHz 2402Mbps
2.4GHz 574Mbps





Specifications

Product Name	AX3000 Dual Band Wi-Fi 6 Range Extender
Product Model	RE3000
Processor	MT7981BA+MT7976CN
Standards and Protocols	IEEE 802.11ax /IEEE 802.11ac /IEEE 802.11n/ IEEE 802.11g /IEEE 802.11a/IEEE 802.11b
Frequency	2.4GHz & 5GHz (11ax)
Bandwidth	20/40/80/160MHz
Signal Rate	5GHz: Up to 2402Mbps 2.4GHz: Up to 574Mbps
Wireless Security	WPA-PSK / WPA2-PSK / WPA3
Ports	1 10/100/1000Mbps self-adaptive LAN
Power	Direct plug-in power supply (100V-240V)
Buttons	Reset Button / WPS Button
Antenna	2*External Antennas + 1*Internal Antenna
LED Lights	WiFi / WPS / Power
Environment	Operating Temperature: 0°C~40°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing

LED and Button

LED	Colour	Status	Indication
	/	OFF	No power
	White	Flash ON	The system is booting or upgrading System startup is complete
	/	OFF	Not connected to host Wi-Fi
	White	Flash ON	WPS in progress Connected to host Wi-Fi
	OFF	Flash	No host Wi-Fi configuration
	Red Flash	ON	Not connected to host Wi-Fi
	Solid Red	ON	Connected to host Wi-Fi, signal is weak
	Solid Pink	ON	Connected to host Wi-Fi, signal is fair
	Solid White	ON	Connected to host Wi-Fi, signal is good
Reset	Long press for 2 seconds		Press and hold Reset button for 2 seconds until all the LED lights turn on and off.
WPS	Press to take effect		Press the WPS button until WPS LED start flashing.