

19" SLIDING TRAY WITH FRONT FIBRE PROTECTOR


Code: FPP3PC

The FPP3PC sliding patch panel accepts 3 x LGX pass-through adapter plates for a total of 48FO with LC configuration. Modular panel for multi-application with MTP/MPO system, pre-terminated cables or conventional splicing. Easy front access with hinged cable management bar, which provides protection of the patch cords as well as labelling. Panel is supplied unloaded and the modules and plates are supplied separately.




FEATURES

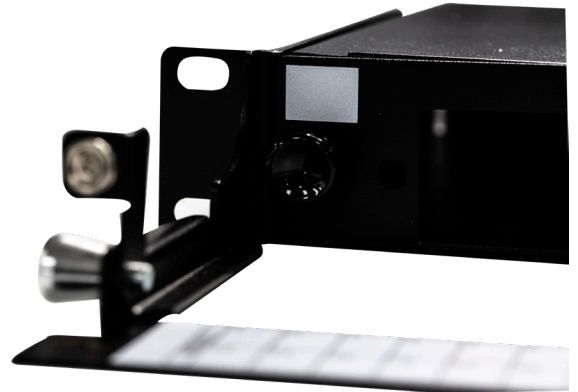


- Includes front fibre protection plate
- High density tray accepts up to 8 spliced fibre cores
- Supplied with 2x 24 position splice cassettes (installed)
- Supplied with internal cable management accessories and cable gland
- Compatible with MPO/MTP cassettes
- Telescopic rackmount brackets
- 4x 20mm and 2x 25mm rear cable gland entry points
- Easy panel identification labeling
- High quality tray, made from cold rolled steel
- Dimensions: 483 x 300 x 44mm (WxDxH)
- Colour: Black Matte
- Weight fully loaded: 2.6Kg



APPLICATIONS

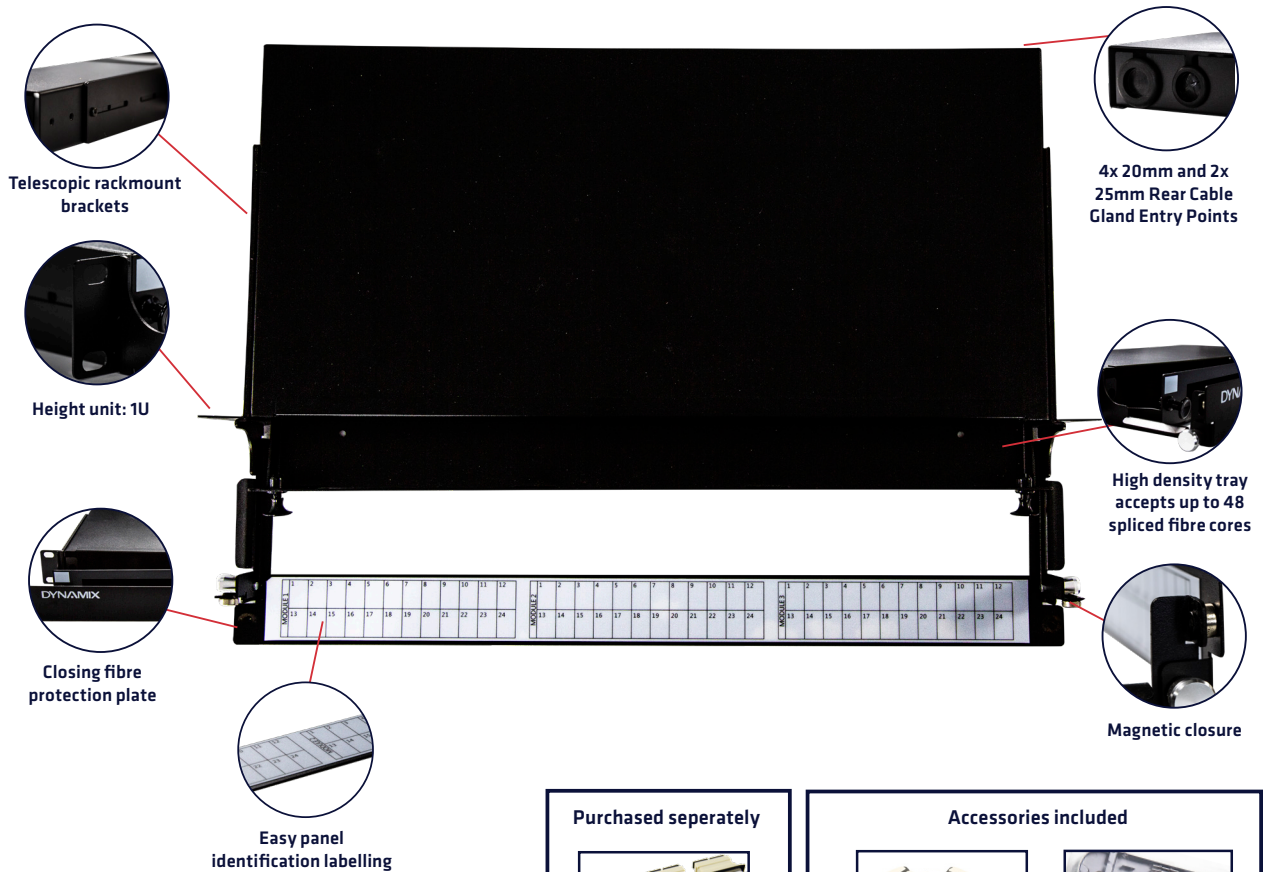- Indoor application
- Accepts indoor and outdoor pre-terminated cables and MTP system or Splicing



Purchased seperately	Accessories included	
 <p>2 Tier Screwless Fibre Adapter Plates</p>	 <p>Supplied with Internal Cable Management Accessories & Cable Gland</p>	 <p>2x 24 Position Splice Cassettes</p>

SPECIFICATIONS	
Mounting Type	Rack 19"
Height Unit	1U
Material	Cold rolled steel
Housing Colour	Black Matte
Application	Indoor IP20
Dimensions (W x D x H)	483 x 300 x 44mm
Net Weight	2.6Kg

